

High Efficient Rectifier

■特征 Features

- I_o 1.0A
- VRRM 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability


■用途 Applications

- 整流用 Rectifier

■ 极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

■外形尺寸和印记 Outline Dimensions and Mark

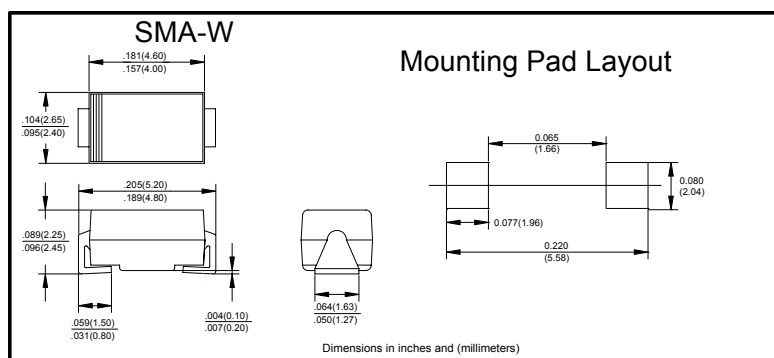[illegible]

■电特性 (Ta=25℃ 除非另有规定)

Electrical Characteristics (T_a=25°C Unless otherwise specified)

[illegible]

■特性曲线（典型） Characteristics(Typical)




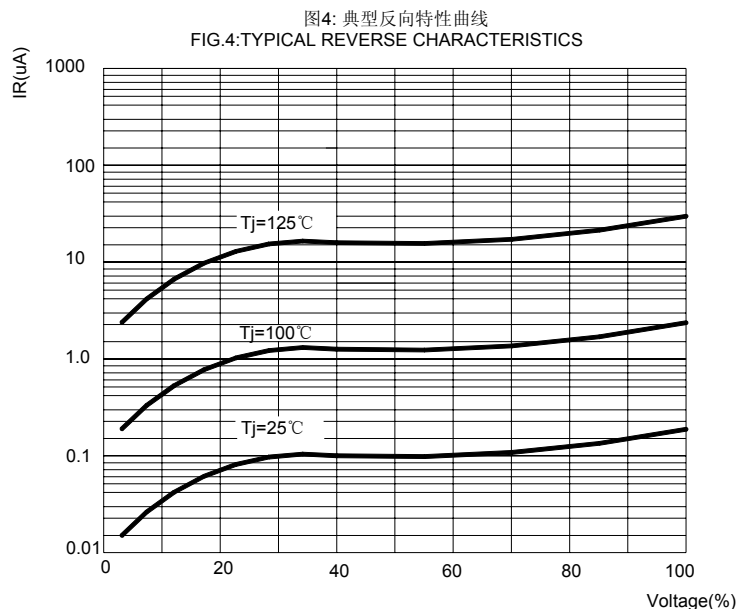


图5: 反向恢复时间试验电路及测试波形示意图
FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

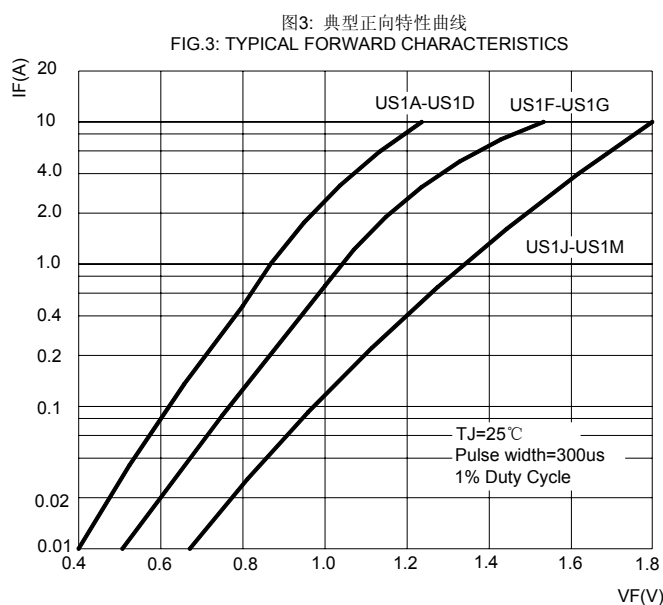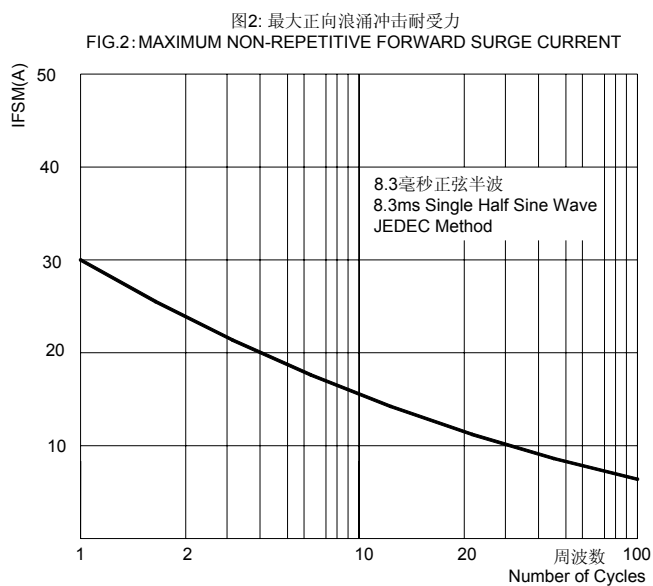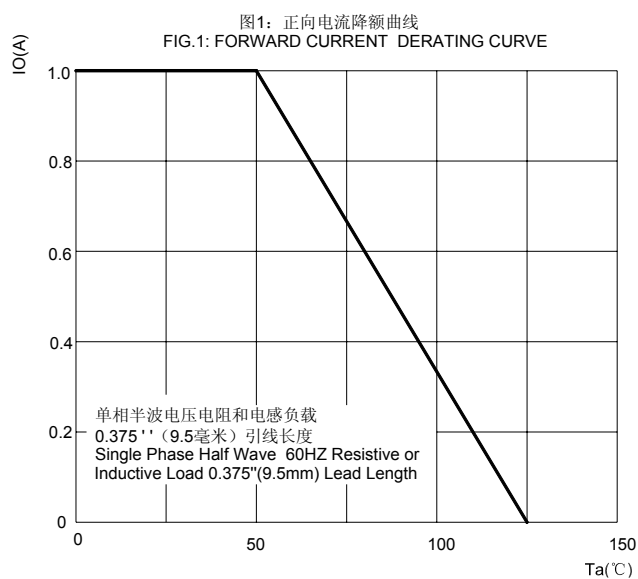