

HGBJ35 SERIES



Glass Passivated 3 Phase Bridge Rectifiers

Reverse Voltage - 800 to 1600Volts

Forward Current - 35 Amperes

RoHS
COMPLIANT

HGBJ

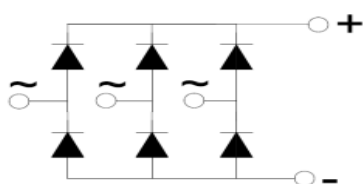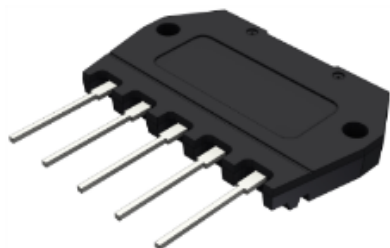

Features

- Low forward voltage drop
- High current capability
- High reliability
- Meet UL flammability classification 94V-0

Mechanical Data

- Case: Epoxy case with heat sink
- Polarity: Symbol marked on body
- Mounting position:
- Maximum Mounting torque (M4)¹: 0.8 N.m

Applications

- For use in high power supply inverters, servo motor and welding machine applications

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	HGBJ35 -08	HGBJ35 -10	HGBJ35 -12	HGBJ35 -16	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	800	1000	1200	1600	V
Maximum RMS Voltage	V_{RMS}	560	700	840	1120	V
Maximum DC Blocking Voltage	V_{DC}	800	1000	1200	1600	V
Peak Non-Repetitive Reverse Voltage	V_{RSM}	900	1100	1300	1700	V
Maximum Average Forward Rectified Current @T _c =110 °C	$I_{(AV)}$	35				A
Peak Forward Surge Current, 8.3mS Single Half Sine-Wave, Superimposed on Rated Load (JEDEC Method)	I_{FSM}	400				A
I ² t Rating for Fusing (t<8.3mS)	$I^2 t$	664				A ² S
Peak Forward Voltage per Diode at 17.5A DC	V_F	1.1				V
Maximum DC Reverse Current at Rated @T _J =25°C	I_R	5				μA
DC Blocking Voltage per Diode @T _J =150°C		3				mA
Typical Thermal Resistance to Case	$R_{\theta JC}$	0.8				°C/W
RMS Isolation Voltage from Case to Lead	V_{ISO}	2500				V
Operating Junction Temperature Range	T_J	-55 to +150				°C
Storage Temperature Range	T_{STG}	-55 to +125				°C

Notes: 1. Surface roughness of Heat sink <0.05mm

2. The typical data above is for reference only

Rating and Characteristic Curves

HGBJ35 SERIES

Fig. 1 - Forward Current Derating Curve

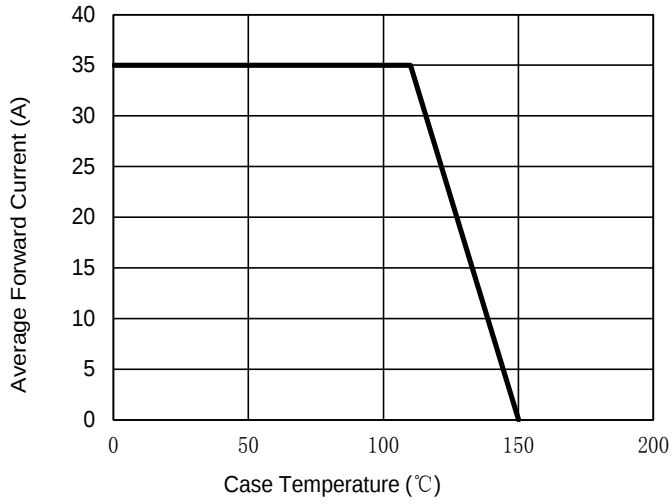


Fig. 2 - Maximum Non-Repetitive Surge Current

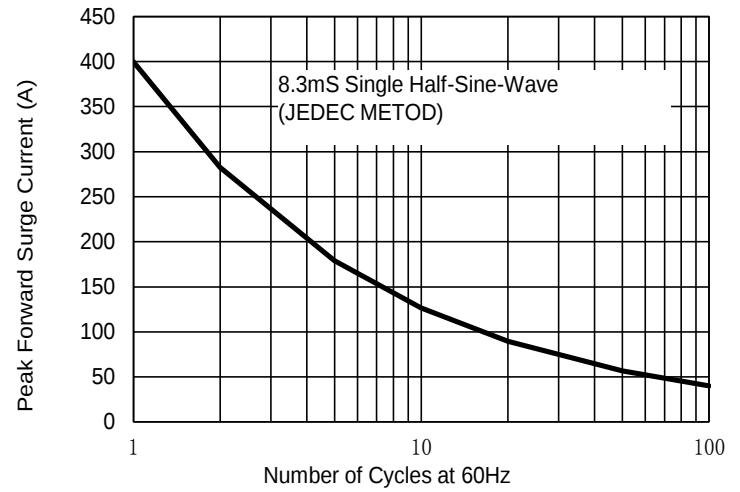


Fig. 3 - Typical Reverse Characteristics



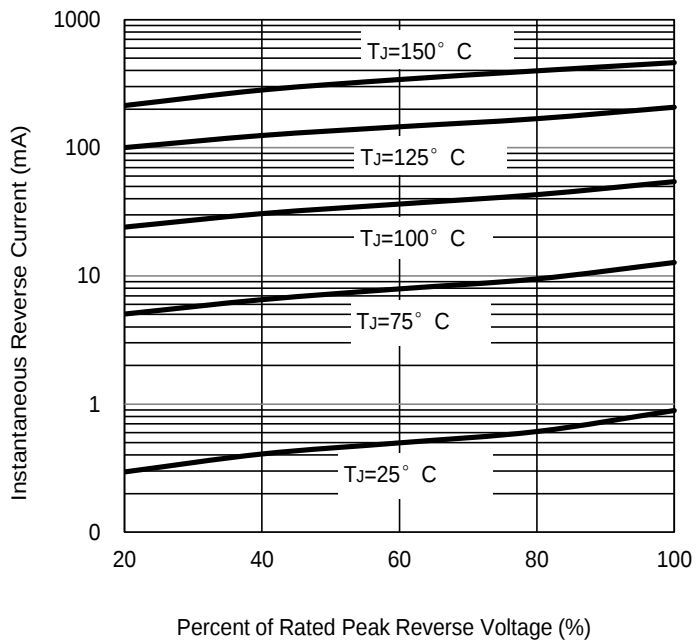


Fig. 4 - Typical Forward Characteristics

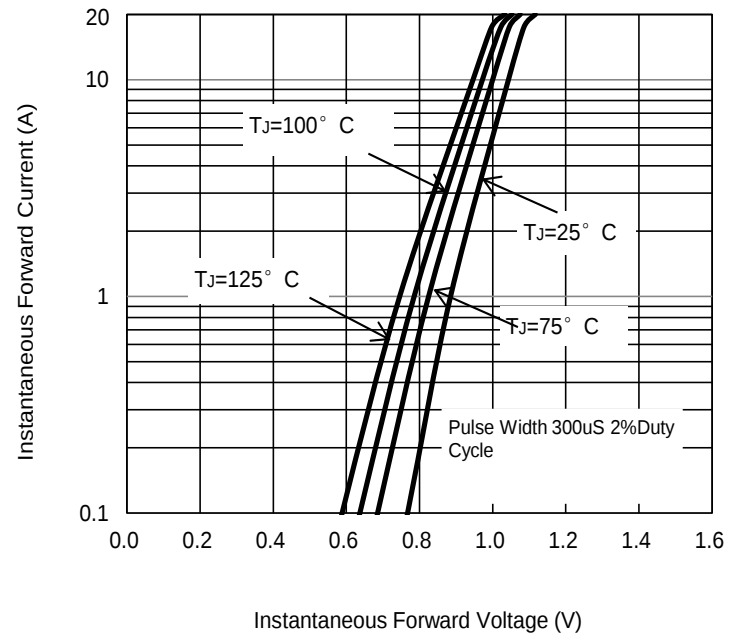

PACKAGE OUTLINE DIMENSIONS

HGBJ

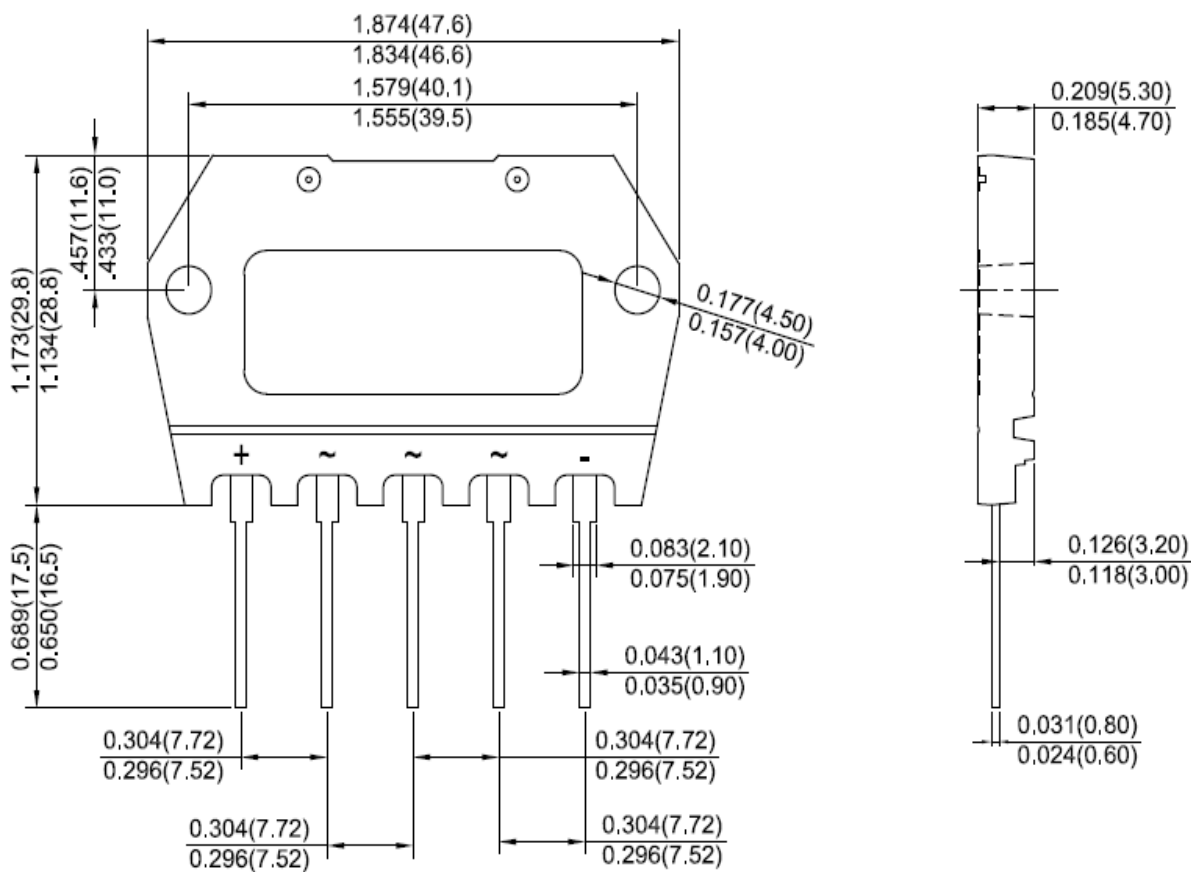

Package Outline Dimensions in Inches (Millimeters)